

TECHNICAL SPECIFICATION SHEET

ZNL60

ZOO
ARCHITECTURAL HARDWARE



ZNL60SC



ZNL60CP



ZNL60-EB



ZNL60PCB



ZNL60PCW


SPECIFICATION


- Non-deadlocking nightlatch
- 60mm backset
- Bolt can be locked from inside with snib
- 92mm (w) x 70mm (h) x 45mm (d)
- Supplied with 5-pin rim cylinder & keys
- Suitable for 35-54mm thick timber doors
- Available in 5 finishes
- Successfully fire tested in accordance with the requirements of BS EN1634-1, suitable for use on timber fire doors 30 & 60 minutes

SUITABILITY



TECHNICAL



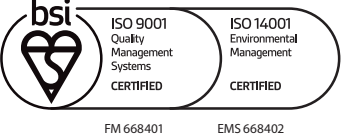CODE	DESCRIPTION	FINISH	ADDITIONAL INFO.
ZNL60SC	Non-deadlocking night latch - 60mm backset	Satin Chrome	c/w 5-pin rim cylinder
ZNL60CP	Non-deadlocking night latch - 60mm backset	Polished Chrome	c/w 5-pin rim cylinder
ZNL60EB	Non-deadlocking night latch - 60mm backset	Electro Brass	c/w 5-pin rim cylinder
ZNL60PCB	Non-deadlocking night latch - 60mm backset	Powder Coat Black	c/w 5-pin rim cylinder
ZNL60PCW	Non-deadlocking night latch - 60mm backset	Powder Coat White	c/w 5-pin rim cylinder
ZINL30G	1mm Intumescent Kit to ZNL60 Night Latch	Graphite	30 Minute Fire Rated Doors
ZINL60G	1mm/2mm Intumescent Kit to ZNL60 Night Latch	Graphite	60 Minute Fire Rated Doors
 For more information please contact us today: ERA Home Security T/A Zoo Hardware, Unit B, Dukes Drive, Kingmoor Park North, Carlisle, Cumbria CA6 4SH Call: 01228 672900 Fax: 01228 672928 Email: sales@zoo-hardware.co.uk Web: www.zoohardware.co.uk  FM 668401 EMS 668402			