

TECHNICAL SPECIFICATION SHEET

ZCS006iSS-HEX



ZCS006iSS-HEX

In an emergency, the key is also equipped with a 5mm drive to be able to operate a bathroom lock follower.

SPECIFICATION

- Rose diameter: 52mm
- Rose projection: 8mm
- Spindle size: 5mm
- Disabled turn
- SS 304 Grade material
- Push on stainless steel outer rose
- Also supplied with 20mm wood screws
- Fire tested suitable for 30 & 60 min timber doors
- Requires hex key ZCS000-HEX-KEY (sold separately)

Only recommended for use with ZOO DIN Locks.
If other locks are required please check for compatibility.

Accessories available:

ZFP01S - Additional fixing pack – complete with bolt fixings

SP25 - 5mm x 65mm spindle


SUITABILITY



STANDARDS



TECHNICAL

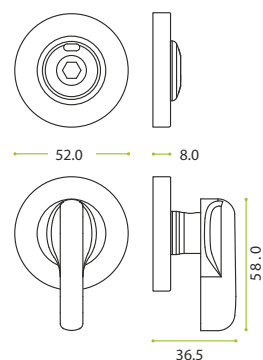

DfE Technical Annex 2D

The Hex release version is available for use in applications that are relevant to the Department for Education Technical Annex 2D: Internal Elements and Finishes. Part 5.2.2.

Part C. refers to Bathroom Locks and states: Bathroom Lock - Lock that can be locked from the inside by turn or lever and can be released from outside by hexagon or star key (not coin-slot).

CODE	DESCRIPTION	FINISH
ZCS006iSS-HEX	Disabled turn and hex release with indicator	Satin Stainless
 For more information please contact us today: ERA Home Security T/A Zoo Hardware, Unit B, Dukes Drive, Kingmoor Park North, Carlisle, Cumbria CA6 4SH Call: 01228 672900 Fax: 01228 672928 Email: sales@zoo-hardware.co.uk Web: www.zoohardware.co.uk  ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management CERTIFIED FM 668401 EMS 668402		