

ZS-SSHF130



The Cranked RTD Lever allows the user to operate the lever and pull or push the door open with a forearm or elbow rather than having to grasp the handle with the hand, the design lifts the operable height of the lever to assist the user, and by simply leaning on the lever it will operate and allow the door to open.


Ideally used with the **ZS-NYHFA** to allow easier operation on the pull side of the door as well as the push side.

CODE	FINISH
ZS-SSHF130-SSS	Satin Stainless

SPECIFICATION

- 19mm diameter tube
- Grade 304 stainless steel
- Cranked RTD lever
- 53 x 6.5mm round sprung rose
- Operated by the forearm
- Reduces contact with hands
- Reduces the spread of germs, bacteria, viruses and infection
- Heso spindle
- Bolt through fixings included
- Suitable for 35-54mm doors

TECHNICAL

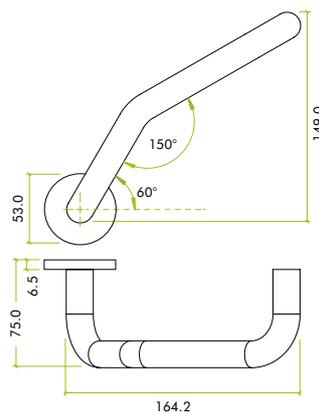

CODE	DESCRIPTION	ADDITIONAL INFO.
ZS-SSHF130-SSS	Cranked RTD lever on rose	Grade 304 stainless steel



For more information please contact us today:

Zoo Hardware, Unit B, Dukes Drive,
Kingmoor Park North, Carlisle, Cumbria CA6 4SH

Call: 01228 672900
Fax: 01228 672928
Email: sales@zoo-hardware.co.uk
Web: www.zoohardware.co.uk



URS is a member of Registrar of Standards (Holdings) Ltd.