

TECHNICAL SPECIFICATION SHEET

ZPS007iSS-HEX




SPECIFICATION	SUITABILITY	TECHNICAL
---------------	-------------	-----------

- Rose diameter: 50mm
- Rose projection: 8mm
- Spindle size: 5mm
- Disabled RTD lever turn
- SS 304 Grade material
- Screw on stainless steel outer rose
- Also supplied with 20mm wood screws
- Fire tested suitable for 30 & 60 min timber doors
- Requires hex key ZCS000-HEX-KEY (sold seperately)



STANDARDS

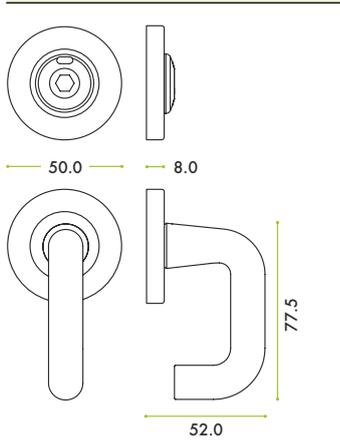

DfE Technical Annex 2D
The Hex release version is available for use in applications that are relevant to the Department for Education Technical Annex 2D: Internal Elements and Finishes. Part 5.2.2.

Part C. refers to Bathroom Locks and states: Bathroom Lock - Lock that can be locked from the inside by turn or lever and can be released from outside by hexagon or star key (not coin-slot).

CODE	DESCRIPTION	FINISH
ZPS007iSS-HEX	Disabled RTD lever turn and hex release with indicator	Satin Stainless



For more information please contact us today:
ERA Home Security T/A Zoo Hardware,
Unit B, Dukes Drive, Kingmoor Park North,
Carlisle, Cumbria CA6 4SH

Call: 01228 672900
Fax: 01228 672928
Email: sales@zoo-hardware.co.uk
Web: www.zoohardware.co.uk

