

**ZSHP**



### ADJUSTING INSTRUCTIONS

Before fitting it is advised to decrease the torque (see Fig 2)

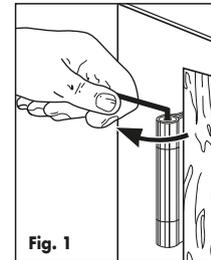


Fig. 1

#### To Increase Torque (Fig 1)

- Close door
- Engage 5/32" hex wrench
- Rotate clockwise to increase torque
- Do not exceed 6 ratchet "clicks"

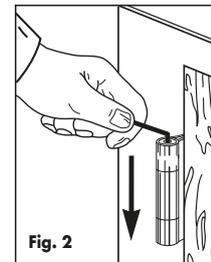


Fig. 2

#### To Decrease Torque (Fig 2)

- Close door
- Engage 5/32" hex wrench
- Firmly depress wrench to disengage ratchet mechanism
- Let wrench rotate counter-clockwise to new setting
- Allow wrench to rise

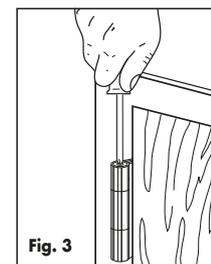


Fig. 3

#### Install Locking Safety Screw (Fig 3)


- Install 6-32 5/8" recessed head machine screw packed with hinge

CODE	FINISH
ZSHPCP	Polished chrome
ZSHPSC	Satin chrome

### PRODUCT SPECIFICATIONS

- 89mm x 87mm x 2mm
- Radius profile
- Contains 2 sprung and 1 unsprung hinge
- Steel

### TECHNICAL

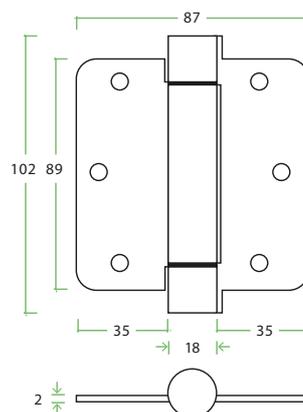

### STANDARDS

### SUITABILITY



CODE	DESCRIPTION	FINISH	ADDITIONAL INFO.
ZSHPCP	Spring hinge pack	CP	2 sprung & 1 unsprung hinge
ZSHPSC	Spring hinge pack	SC	2 sprung & 1 unsprung hinge



#### For more information please contact us today:

Zoo Hardware Ltd, Unit B, Dukes Drive,  
Kingmoor Park North, Carlisle, Cumbria CA6 4SH

**Call: 01228 672900**

**Fax: 01228 672928**

**Email: sales@zoo-hardware.co.uk**

**Web: www.zoohardware.co.uk**



URS is a member of Registrar of Standards (Holdings) Ltd.